

Mini-Bar Series

Receptacles with Flat Targets



The Mini-Bar series is the smallest portable memory form factor in the Datakey product line. Measuring only 0.64 inches in length, Mini-Bar receptacles are 60% smaller than Bar receptacles⁵. Mini-Bar receptacles mate with all Mini-Bar memory tokens (see Mini-Bar token datasheets for more information²). The receptacles are designed to mount on the surface of an OEM device (enclosure, housing, panel, etc.) or can be integrated into a corner, with nothing extending into the device. Spring probes may be used to make contact with the flat targets on the bottom of the receptacle. This mounting method minimizes the amount of interior space required to integrate the receptacle into the OEM device. Mini-Bar receptacles are available with or without an adhesive gasket. The receptacle is secured using two screws (not included). ATEK offers an interface board with a low-profile FPC/FFC connector. An off-the-shelf flat flex cable may be used to connect the receptacle to internal circuitry.

Designed for use in the most challenging environments, the Mini-Bar series meets several MIL-STD-810 specifications, provides an intuitive slide-in/slide out operation, and features an open design for easy in-field cleaning. The Mini-Bar receptacle also features a retention pin that helps to keep the token firmly in place during operation – standing up to the most demanding shock and vibration requirements.



NOTES:
Conforms with Directive 2011/65/EU of the European Parliament and of the Council of 8 June 2011, and as amended by Directive 2015/863/EU, on the restriction of the use of certain hazardous substances in electrical and electronic equipment.

MECHANICAL

Operating Life	25,000 Insertion/Removal Cycles Min.
Vibration ³	MIL-STD-810H, Method 514.8, Proc. I
Shock ³	MIL-STD-810H, Method 516.8, Proc. I Operating ⁴ : 40 g 11 ms – Typical Token Retention: >250 g 5-6 ms – Typical (token retained in receptacle)

ELECTRICAL

Contact Resistance	< 100 mΩ
--------------------	----------

ENVIRONMENTAL

Storage Temperature	-40°C to +100°C
Operating Temperature	-40°C to +85°C
Relative Humidity	5% - 95% (non-condensing)
Immersion	MIL-STD-810H, Method 512.6, Proc. I
Salt-Fog	MIL-STD-810H, Method 509.8, Proc. I
Blowing Dust	MIL-STD-810H, Method 510.7, Proc. I
Blowing Sand	MIL-STD-810H, Method 510.7, Proc. II
Freezing Rain	MIL-STD-810H, Method 521.4, Glaze Ice
Altitude	MIL-STD-810H, Method 500.6, Proc. I & II ≤40,000 ft (12,192 m)
Solar Radiation	MIL-STD-810H, Method 505.7, Proc II
Other	Contact ATEK for Further Information on Additional Qualification Tests (including thermal shock, fungus & chemical resistance)

MOUNTING COMPONENT(S)

Threaded Fasteners	(2) #0-80 thread, max thread engagement: 0.125", max torque rating: 2.5 in-lbf (28 N-cm)
Gasket (where included)	3M VHB Adhesive Gasket – 0.015" (0.38 mm) Nominal Thickness

INTERFACING COMPONENT(S)

Interface Board	607-0090-000A Interface Board Contains Molex p/n: 5034800800 FPC/FFC Connector
-----------------	--

MATING COMPONENTS

Memory Tokens	SSJ and ISJ Series of Mini-Bar Memory Tokens
---------------	--

ORDERING INFORMATION¹



MBRFG	606-0081-000A (flat targets, gasket)
MBRFN	606-0081-001A (flat targets, no gasket)

- 1: "A" suffix on part number indicates RoHS compliance.
- 2: Customers must design to meet Datakey interface specifications to provide for future memory device compatibility. Interface specifications available at datakey.com.
- 3: Specification for receptacle with mated token.
- 4: No discontinuities greater than one microsecond allowed.
- 5: Volume comparison between BRFN and MBRFN

Mini-Bar Series



The power of memory. Secured.

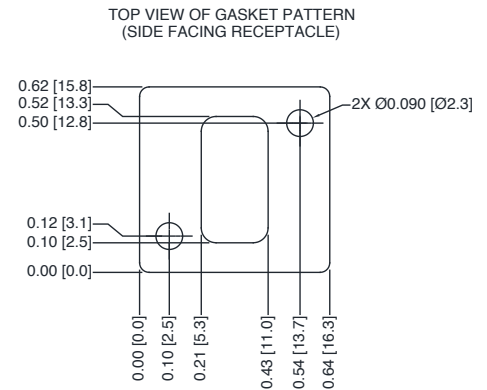
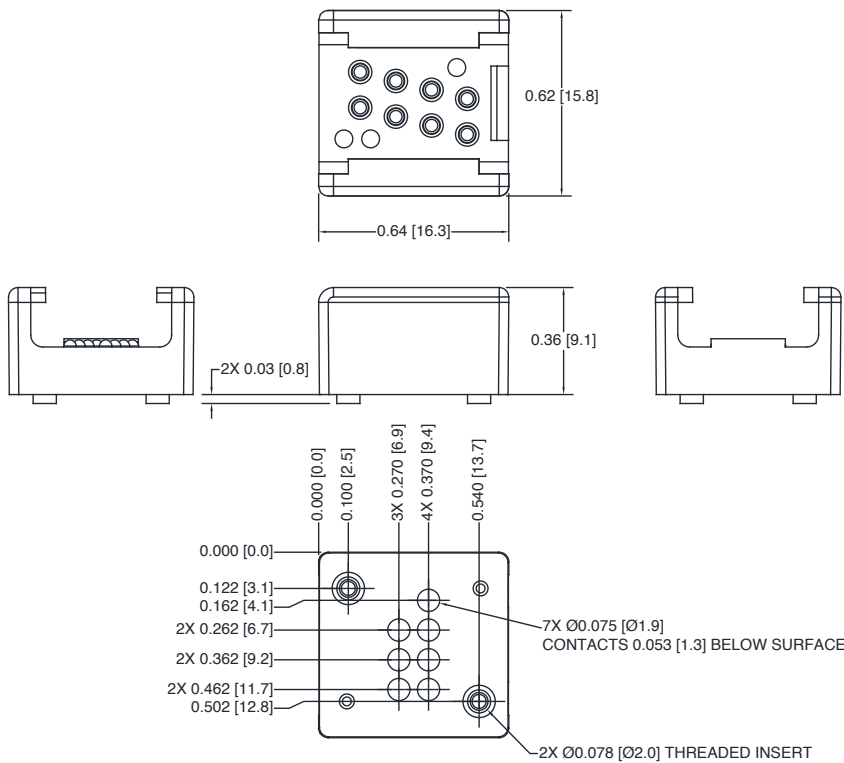


MATING SURFACE REQUIREMENTS: $\sqrt{0.005}$ AND $\sqrt{32}$

Drawing dimensions are in inches and millimeters [mm].
Dimensions are nominal and subject to manufacturer's tolerances.

PIN-OUT CHART

Pin #	I ² C	SPI
1	LOFO	LOFO
2	Ground (GND)	Ground (GND)
3	Power (V _{cc})	Power (V _{cc})
4	Size	/Chip Select (/CS)
5	Serial Clock (SCL)	Serial Clock (SCK)
6	NC	Serial Data In (SI)
7	Serial Add/Data (SDA)	Serial Data Out (SO)

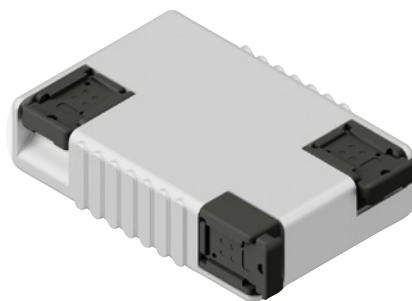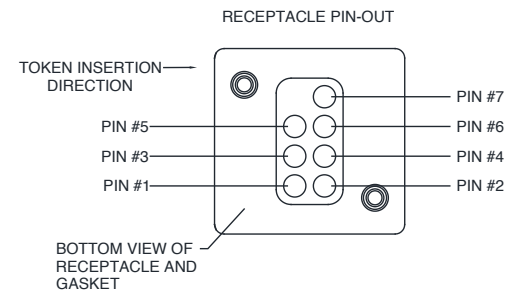

Installation Recommendations: Mini-Bar receptacles are designed to be mounted on the surface of an OEM device (enclosure, housing, panel, etc.). It is also possible to flush-mount the Mini-Bar receptacle by incorporating it into a slot or corner as shown (left). The OEM should provide a slot in the housing for the spring probes or the interface board. See interface board datasheet for recommended wall thickness. The receptacle is mounted using an optional adhesive gasket and two #0-80 threaded inserts (screws provided by the OEM -- hex drive screw recommended). Contact ATEK with questions on mounting and installation.

221-0226-000 Rev. C 10/25

View our full product line at www.datakey.com

ATEK Access Technologies
10025 Valley View Road, Ste. 190
Eden Prairie, MN 55344 U.S.A.

PH: 1.800.523.6996
FAX: 1.800.589.3705
+1.218.829.9797

www.atekaccess.com



Access the power of technology.

©2025 ATEK Access Technologies, LLC. All Rights Reserved. Datakey images and marketing materials are protected by various patents, copyrights and/or trademarks. ATEK assumes no responsibility for any errors which may appear in this document, reserves the right to change devices or specifications detailed herein at any time without notice, and does not make any commitment to update the information contained herein. No licenses to patents or other intellectual property of ATEK are granted by the Company in connection with the sale of Datakey products, expressly or by implication.