


ISJ Series

Serial Memory Mini-Bar Tokens



The ISJ series of Mini-Bar memory tokens contain 16Kb or 256Kb of non-volatile, serial I²C EEPROM memory¹. The memory is solid over-molded using a rugged composite that protects the embedded memory and is resistant to environmental influences such as vibration, ice, dirt, moisture, chemicals, and electrostatic discharge. Each token contains a hole so it can be attached to a keychain or a lanyard. The ISJ token is an ideal credential or low-capacity data transfer solution for small hand-held mobile devices operating in harsh environments.

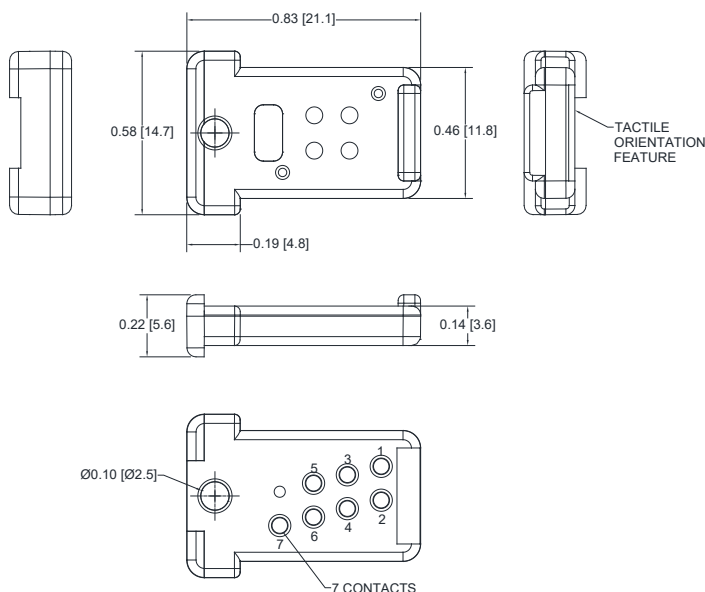

Drawing dimensions are in inches and millimeters [mm].
Dimensions are nominal and subject to manufacturer's tolerances.

NOTES:
Conforms with Directive 2011/65/EU of the European Parliament and of the Council of 8 June 2011, and as amended by Directive 2015/863/EU, on the restriction of the use of certain hazardous substances in electrical and electronic equipment.



MECHANICAL²

Color*	Black (-000A), Red (-002A), Yellow (-004A), Gray (-008A)
Weight	~1.4 grams
Contact Life	15,000 Insertion/Removal Cycles Min.
Drop Test	Multiple 10-ft Drops to Concrete

ELECTRICAL

Power, Active	25 mW, Typical at 5 V
Power, Standby	200 µW, Typical at 5 V
Voltage	2.7 V to 5.5 V (3.3 V recommended) ⁴
ESD Protection	15 kV (air discharge) EN 61000-4-2

ENVIRONMENTAL²

Storage Temperature	-40°C to +100°C
Operating Temperature	-40°C to +85°C
Relative Humidity	5% - 95% (non-condensing)
Immersion	MIL-STD-810H, Method 512.6, Proc. I
Salt-Fog	MIL-STD-810H, Method 509.8, Proc. I
Freezing Rain	MIL-STD-810H, Method 521.4, Glaze Ice
Altitude	MIL-STD-810H, Method 500.6, Proc. I & II ≤40,000 ft (12,192 m)
Solar Radiation	MIL-STD-810H, Method 505.7, Proc II
Other	Contact ATEK for Further Information on Additional Qualification Tests (including thermal shock, fungus & chemical resistance).

MEMORY

Capacity	16Kb (16,384 bits) 256Kb (262,144 bits)
Read Cycles	Unlimited
Write/Erase Cycles	1,000,000 Minimum
Data Life (Storage)	20 Years Minimum

MATING COMPONENT(S)

Mini-Bar Receptacle with Header	MBRHG: 606-0080-000A (includes gasket) MBRHN: 606-0080-001A (no gasket)
Mini-Bar Receptacle with Flat Targets	MBRFG: 606-0081-000A (includes gasket) MBRFN: 606-0081-001A (no gasket)
Programmer	MBLink III: 607-0092-000A

ORDERING INFORMATION³

ISJ16Kb	611-0243-00xA
ISJ256Kb	611-0244-00xA

- 1: I²C EEPROM Interface Specification available at datakey.com
 - 2: See Mini-Bar receptacle datasheets for mechanical and environmental specifications when mated.
 - 3: "x" indicates optional color number. "A" suffix on part number indicates RoHS compliance. See CE declaration for details.
 - 4: It is recommended that all new key/token implementations be designed to operate with power supplies in the range of 2.7 to 3.6 volts. Although there are no immediate difficulties in procuring memory devices that operate in the 4.5 to 5.5 volt range, future availability may be impacted as semiconductor manufacturers shrink their die geometries.
- *Contact ATEK for additional color options.

221-0227-000 Rev. D 8/26

View our full product line at www.datakey.com

ATEK Access Technologies
210 10th Avenue NE
Brainerd, MN 56401 USA

Telephone:
1-800-523-6996
+1-218-829-9797

www.atekaccess.com



Access the power of technology.

©2026 ATEK Access Technologies, LLC. All Rights Reserved. Datakey images and marketing materials are protected by various patents, copyrights and/or trademarks. ATEK assumes no responsibility for any errors which may appear in this document, reserves the right to change devices or specifications detailed herein at any time without notice, and does not make any commitment to update the information contained herein. No licenses to patents or other intellectual property of ATEK are granted by the Company in connection with the sale of Datakey products, expressly or by implication.